

EKONOMİK SERİ DİJİTAL ZAMAN RÖLESİ

LOW COST DIGITAL ON DELAY TIMER




GENEL ÖZELLİKLER

- Çift çıkışlı ekonomik dijital zaman rölesi
- Besleme ON ile ani kontak ve gecikme
- OUT1: Gecikme Çıkışı
- OUT2: Ani Kontak
- 1x3 Seven Segment LED Display
- 4 ayrı seçilebilir zaman seçeneği:
 - 99.9 saniye; hassasiyet 0.1 saniye
 - 999 saniye; hassasiyet 1 saniye
 - 99.9 dakika; hassasiyet 0.1 dakika
 - 999 dakika; hassasiyet 1 dakika
- Program ve kontrol parametrelerini sürekli hafızada tutabilme
- Soketli klemens ile kolay bağlantı imkanı

GENERAL SPECIFICATION

- Low cost Digital Timer with OUT1 & OUT2 output
- Instantaneous and Delayed output with power ON
- OUT1: Delayed Output
- OUT2: Instantaneous Output
- 1x3 Seven Segment LED Display
- Selectable 4 different time base:
 - 99.9 seconds; resolution 0.1 second
 - 999 seconds; resolution 1 second
 - 99.9 minutes; resolution 0.1 minute
 - 999 minutes; resolution 1 minute
- EEPROM memory to store settings
- Easy connection with plug-in connectors

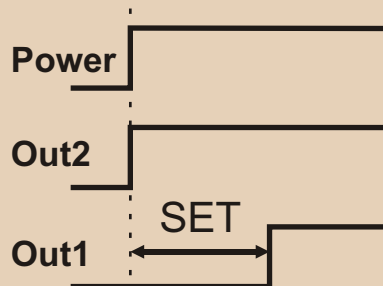

TEKNİK ÖZELLİKLER

- Ebat : DZ900:96x96x90mm, DZ721:72x72x100mm, DZ481:48x48x105mm (ExBxD)
- Pano Kesitleri: DZ900:90x90mm, DZ721:68x68mm, DZ481:45x45mm
- Gösterge: 1x3 Hane 7 Segment
- START: Enerji ile ani ve gecikmeli kontak
- Çıkış: Out1, Out2; 2 x Röle (NA-O-NK), 250VAC, 2A, Rezistif yük (DZ481; OUT2 sadece NA)
- Out1: Gecikme Çıkışı
- Out2: Ani Kontak
- Zaman seçimi: 999 dakika / 99.9 dakika / 999 saniye / 99.9 saniye, ön panelden seçmeli
- Çıkış Fonksiyonu: Ani kontak ve ON DELAY
- Doğruluk: \pm % 1.5 (SET değerinin)
- Besleme Voltajı: 100 .. 240VAC, 50 - 60Hz
- Güç Tüketimi: < 5VA
- Çalışma Sıcaklığı: 0 .. 50 °C
- Çalışma İrtifası: < 2000m

TECHNICAL SPECIFICATION

- Dimensions : DZ900:96x96x90mm, DZ721:72x72x100mm, DZ481: 48x48x105mm(WxHxD)
- Panel cut-out: DZ900:90x90mm,DZ721:68x68mm, DZ481:45x45mm
- Display: 1x3 Digit 7 Segment
- START: Counts down after POWER ON
- Output: Out1, Out2; 2 x Relay (NO-O-NC), 250VAC, 2A, Resistive load (DZ481: OUT2 only NO)
- Out1: Delayed output
- Out2: Instantaneous output
- Time selection: 999 minutes/ 99.9 minutes/ 999 seconds / 99.9 seconds, selectable via front panel
- Mode of Operation: Instantaneous and Delayed output after POWER ON.
- Accuracy: \pm % 1.5 (of SET value)
- Supply Voltage: 100 .. 240VAC, 50 - 60Hz
- Power Consumption: < 5VA
- Operating Temperature: 0 .. 50 °C

Sipariş Kodu / Ordering Code:

Model: DZ900, DZ721, DZ481

GEMO-Gürbüzöğlü Elektronik

Sanayi ve Ticaret Ltd. Şti.

Konya Sok. Alkan Elektronik Plaza, No:13 / 55

Ulus, ANKARA, TÜRKİYE

Tel: (+9)0-312-311 12 45

Fax: (+9)0-312-312 48 73

URL: www.gemo.com.tr