

DIGITAL PANELMETER



GENEL ÖZELLİKLER

- Mikroişlemci tabanlı
- Yüksek hassasiyet ve doğruluk
- 3 veya 4 haneli 7 segment gösterge
- 72x72 mm veya 48x48 Pano kesiti (48x48mm sadece AC Voltmetre)

DPM72-VAC500 / DPM48-VAC500

- Panel tipi AC Voltmetre
- Giriş: 0..500 VAC

DPM72-VDC18

- Panel tipi DC Voltmetre
- Giriş: 0..18.0 VDC

DPM72-VDC36

- Panel tipi DC Voltmetre
- Giriş: 0..36.0 VDC

DPM72-VDC100

- Panel tipi DC Voltmetre
- Giriş: 0..100 VDC

DPM72-ADC

- Panel tipi DC Ampermetre
- Giriş: 0..60 mV
- Kademe seçimli: 30, 100, 200, 300, 500, 600, 750, 1000, 1250, 1500, 1750, 2000, 2500, 3000, 4000, 5000

DPM72-AAC10

- Panel tipi AC Ampermetre
- Giriş: 0..10A

DPM72-AAC-K

- Panel tipi AC Ampermetre
- Giriş: 0..5A
- Kademe seçimli: 5, 20, 30, 50, 75, 100, 150, 200, 250, 300, 400, 500, 750, 1000, 1250, 1500

GENERAL SPECIFICATION

- Microcontroller based
- High accuracy
- 3 or 4 digit 7 segment display
- 72x72 mm / 48x48mm (48x48mm only AC Voltmeter)

DPM72-VAC500 / DPM48-VAC500

- Panel type AC Voltmeter
- Input: 0..500 VAC

DPM72-VDC18

- Panel type DC Voltmeter
- Input: 0..18.0 VDC

DPM72-VDC36

- Panel type DC Voltmeter
- Input: 0..36.0 VDC

DPM72-VDC100

- Panel type DC Voltmeter
- Input: 0..100 VDC

DPM72-ADC

- Panel type DC Ampermeter
- Input: 0..60 mV
- User selectable Scale: 30, 100, 200, 300, 500, 600, 750, 1000, 1250, 1500, 1750, 2000, 2500, 3000, 4000, 5000

DPM72-AAC10

- Panel type AC Ampermeter
- Input: 0..10A

DPM72-AAC-K

- Panel type AC Ampermeter
- Input: 0..5A
- User selectable Scale: 5, 20, 30, 50, 75, 100, 150, 200, 250, 300, 400, 500, 750, 1000, 1250, 1500

TEKNİK ÖZELLİKLER



TECHNICAL SPECIFICATION

DPM72 / DPM48 Panelmetre

- Ebat: 72x72x100mm, 48x48X105mm (ExBxD)
- Pano Kesitleri: 68x68mm, 45x45mm
- Gösterge: 3 veya 4 Hane 7 Segment
- Duyarlık: ± 1 hane
- Doğruluk: $\pm \% 1$ (Tam Skalanın)
- Besleme Voltajı: 230VAC $\pm 10\%$, -20% , 50 - 60Hz
- Güç Tüketimi: $< 8VA$
- Çalışma Sıcaklığı: 0 .. 50 °C
- İşletme İrtifası: $< 2000m$

DPM72 / DPM48 Panelmeter

- Dimensions :72x72x100mm, 48x48X105mm (WxHxD)
- Panel cut-out: 68x68mm, 45x45mm
- Display: 3 or 4 Digit 7 Segment
- Resolution: ± 1 Digit
- Accuracy: $\pm \% 1$ (Over full scale)
- Supply Voltage: 230VAC $\pm 10\%$, -20% , 50 - 60Hz
- Power Consumption: $< 8VA$
- Operating Temperature: 0 .. 50 °C
- Operating Altitude: $< 2000m$

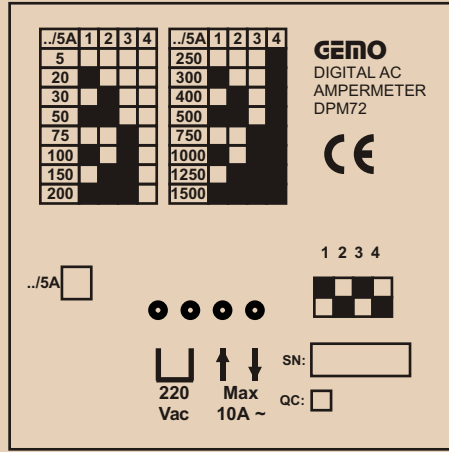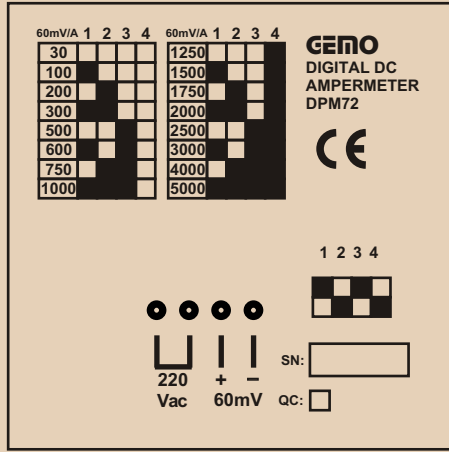

Sipariş Kodu / Ordering Code:

- DPM72-VAC500: AC Voltmetre / AC Voltmeter (mica front panel)
- DPM48-VAC500: AC Voltmetre / AC Voltmeter (mica front panel)
- DPM72-VDC18: DC Voltmetre / DC Voltmeter (Lexan front panel)
- DPM72-VDC36: DC Voltmetre / DC Voltmeter (Lexan front panel)
- DPM72-VDC100: DC Voltmetre / DC Voltmeter (Lexan front panel)
- DPM72-ADC: DC Ampermetre / DC Ampermeter (Lexan front panel)
- DPM72-AAC10: AC Ampermetre / AC Ampermeter (Lexan front panel)
- DPM72-AAC-K: AC Ampermetre / AC Ampermeter (Lexan front panel)

GEMO-Gürbüzöğlü Elektronik

Sanayi ve Ticaret Ltd. Şti.

Konya Sok. Alkan Elektronik Plaza, No:13 / 55

Ulus, ANKARA, TÜRKİYE

Tel: (+9)0-312-311 12 45

Fax: (+9)0-312-312 48 73

URL: www.gemo.com.tr